

HEAVY DUTY HIGH INTENSITY HEATER



SUPERIOR
RADIANT PRODUCTS

**RIGID
HEAVY DUTY
CONSTRUCTION**

SERIES S STANDARD EFFICIENCY HIGH INTENSITY HEATER

**Directed, cost-effective heat
for cold spots in industrial and
commercial applications**

- Entire construction is non-corrosive aluminized steel
- Low profile requires less space
- Reliable direct spark or millivolt ignition
- Unique pattern high output ceramics
- Performance enhancing screens
- Modular head construction
- Rates 30,000 to 160,000 BTUH
- NG or LPG




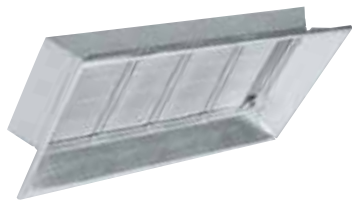
Model S



**Maximized radiant efficiency with
high-polished aluminum reflector**

SUPERIOR TECHNOLOGY SUPERIOR PERFORMANCE
WWW.SUPERIORRADIANT.COM

SERIES S – HEAVY DUTY HIGH INTENSITY HEATER

Heater	Part No.	BTU/HR		Radiating Surface (Sq. In.)	Dimensions			Shipping Weight (lbs.)
		Natural Gas	LPG		Height	Length	Width	
	SD03N*	33,000	–	90	9.2"	16.3"	24.4"	36
	SD03P*	–	30,000					
	SD06N*	66,000	–	180	9.2"	23.1"	24.4"	44
	SD06P*	–	60,000					
	SD09N*	99,000	–	270	9.2"	30.0"	24.4"	56
	SD09P*	–	90,000					
	SD12N*	132,000	–	360	9.2"	36.9"	24.4"	64
	SD12P*	–	120,000					
	SD16N*	160,000	–					

*Substitute "M" for "D" for Millivolt

General Specifications		Inlet Pressure			Accessories Available
Power Supply	24v	–	Natural Gas	Propane	<ul style="list-style-type: none"> • Chain Kits • Thermostats • Transformers • Gas Flex Connectors • Gas Shut Off Valves
Control	Direct Spark or Millivolt Ignition	Minimum	6.5" WC	11" WC	
Gas Supply	1/2" NPT	Maximum	1/2 psig.	1/2 psig.	

For more information please refer to the installation manual

Visit our website for I/O manuals, specifications, and submittal data.



SUPERIOR
RADIANT PRODUCTS

Superior Radiant Products Ltd.
563 Barton Street
Stoney Creek, ON L8E 5S1 Canada

1 800 527 HEAT(4328) | tel 1 905 664 8274 | fax 1 905 664 8846
sales@superiorradiant.com | www.superiorradiant.com



Superior Radiant Products Inc.
315 N Madison Street
Fortville, IN 46040 USA

DISTRIBUTOR

SUPERIOR TECHNOLOGY SUPERIOR PERFORMANCE